

OTi DALI 30/220...240/700 NFC I

OPTOTRONIC Intelligent – DALI NFC I | Compact constant current LED drivers



Areas of application

- Suitable for downlights, spotlights and LED panels
- Suitable for use in luminaires with flexible current setting
- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for indoor SELV installations
- Suitable for luminaires of protection classes I and II

Product family benefits

- Versatile DALI window driver due to flexible output characteristic
- Locking and unlocking of luminaire/driver data
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1...100 % by amplitude dimming
- DALI-2 certified incl. Parts 251, 252, 253



Product datasheet

Product family features

- Supply voltage: 220...240 V
- Line frequency: 0 Hz, 50...60 Hz
- Line voltage: 198...264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression according to EN 55015:2007+A1:2007/CDN
- Immunity according to EN 61547
- Type of protection: IP20
- Cable clamp housing for independent mounting
- Through-looping (TL version)

Technical data

Electrical data

| | |
|--|----------------------------|
| Nominal input voltage | 220...240 V |
| Mains frequency | 0,50,60 Hz |
| Input voltage AC | 198...264 V ¹⁾ |
| Total harmonic distortion | < 10 % ²⁾ |
| Power factor λ | ≥ 0.95 |
| ECG efficiency | 90 % ³⁾ |
| Inrush current | < 20 A ⁴⁾ |
| Max. ECG no. on circuit breaker 10 A (B) | 20 |
| Max. ECG no. on circuit breaker 16 A (B) | 30 |
| Surge capability (L/N-Ground) | 2 kV |
| Surge capability (L-N) | 1 kV |
| Nominal output voltage | 20...50 V ⁵⁾ |
| U-OUT (working voltage) | 60 V |
| Nominal output current | 350...700 mA ⁶⁾ |
| Output current tolerance | $\pm 5\%$ |
| Output ripple current (100 Hz) | < 5 % |
| Nominal output power | 30 W ⁷⁾ |
| Galvanic isolation | SELV |
| Input voltage DC | 176...276 V |
| Current set | DALI / NFC |
| Default output current | 500 mA |

¹⁾ Permitted voltage range

²⁾ At full load, 220...240 V, 50 Hz / see graphs



³⁾ Typical / At full load and 230 V

⁴⁾ $t_{width} = 200 \mu s$ (measured at 50 % I_{peak})

⁵⁾ Maximum 60 V



⁶⁾ $\pm 5\%$

⁷⁾ Partial load 10...30 W

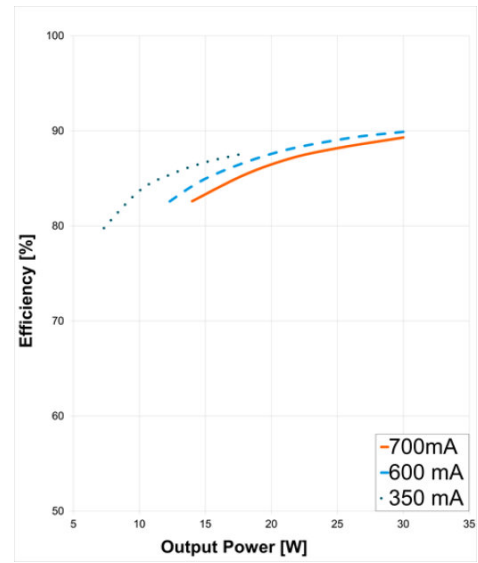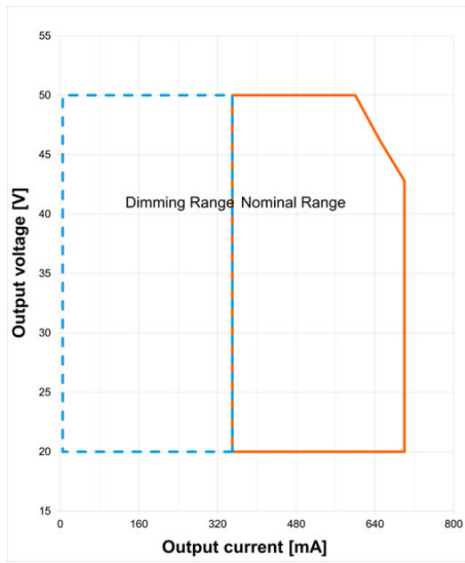

Operating Window


Typical Efficiency v Load 230 V 50 Hz

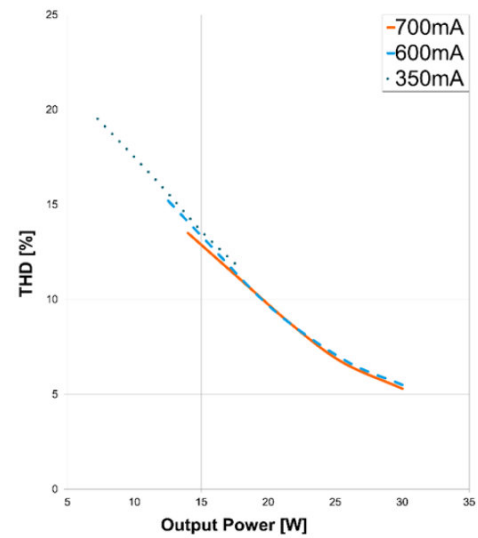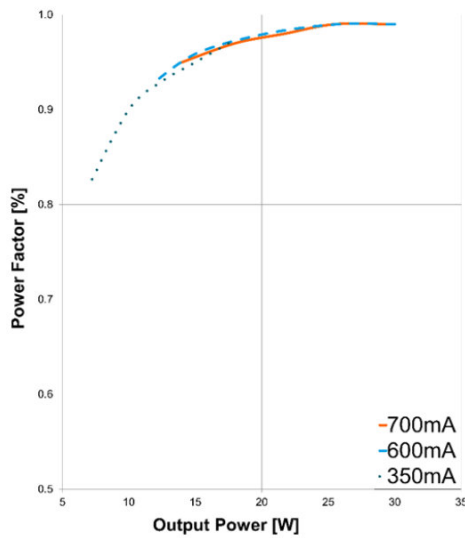

Typical Power Factor v Load

Typical THD v Load

Dimensions & weight

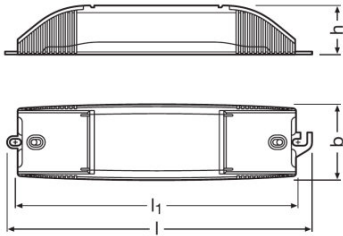

| | |
|--------------------------------------|---|
| Mounting hole spacing, length | 186.5 mm |
| Product weight | 160.00 g |
| Cable cross-section, input side | 0.2...2.5 mm ² ¹⁾ |
| Cable cross-section, output side | 0.2...1.5 mm ² ¹⁾ |
| Wire preparation length, input side | 7...8 mm |
| Wire preparation length, output side | 8.0...9.0 mm |
| Length | 204.0 mm |
| Width | 50.0 mm |
| Height | 32.0 mm |

¹⁾ Solid or flexible leads

Colors & materials

| | |
|-----------------|---------|
| Casing material | Plastic |
|-----------------|---------|

Temperatures & operating conditions

| | |
|--|------------------------|
| Ambient temperature range | -20...+50 °C |
| Maximum temperature at tc test point | 80 °C ¹⁾ |
| Max.housing temperature in case of fault | 110 °C |
| Temperature range at storage | -25...85 °C |
| Permitted rel. humidity during operation | 5...85 % ²⁾ |

¹⁾ Maximum at the Tc-point

²⁾ Maximum 56 days/year at 85 %

Lifespan

| | |
|--------------|--------------------------------|
| ECG lifetime | 50000 / 100000 h ¹⁾ |
|--------------|--------------------------------|

¹⁾ T_c = 80°C, 0.2% / 1,000 h failure rate / T_c = 70°C, 0.1% / 1,000 h failure rate

Additional product data

Product datasheet

| | |
|--------------|----|
| Encapsulated | No |
|--------------|----|

Capabilities

| | |
|--|-------------------------|
| Dimmable | Yes |
| Dimming interface | DALI-2 |
| Dimming range | 1...100 % ¹⁾ |
| Dimming method | Amplitude Modulation |
| Overheating protection | Automatic reversible |
| Overload protection | Automatic reversible |
| Short-circuit protection | Automatic reversible |
| No-load proof | Yes |
| Max. cable length to lamp/LED module | 2.0 m |
| Suitable for fixtures with prot. class | I / II |
| Type of connection, input side | Screw terminal |
| Type of connection, output side | Push terminal |
| Suitable for through-wiring | Yes |
| Suitable for emergency lighting | Yes |
| Constant lumen function | Programmable |
| Programming interface | DALI, NFC |
| Number of channels | 1 |
| DALI-2 Energy Data | Yes ²⁾ |
| DALI-2 Diagnostic Data | Yes ³⁾ |

¹⁾ For maximum nominal output current

²⁾ Acc. DALI part 252

³⁾ Acc. DALI part 253

Programming

| | |
|------------------------|------------|
| Tuner4TRONIC | Yes |
| Tuner4TRONIC Field App | No |
| Programming device | DALI / NFC |

Programmable features

| | |
|---------------------|-----|
| Operating Current | Yes |
| Tuning Factor | Yes |
| Constant Lumen | Yes |
| Lamp Operating Time | Yes |
| End of Life | Yes |
| Driver Guard | Yes |
| DALI Settings | Yes |

Product datasheet

| | |
|------------------------------|-------------------|
| Emergency Mode | Yes |
| DALI-2 Luminaire Data | Yes ¹⁾ |
| Configuration Lock | Yes |
| Soft Switch Off | Yes |
| Dim to Dark | Yes |
| OEM Key | No |

¹⁾ Acc. DALI part 251








Certificates & standards

| | |
|----------------------------------|---|
| Approval marks – approval | CE / EL / DALI-2 / EAC |
| Standards | Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386/Acc. to IEC 62386-101:Ed2/Acc. to IEC 62386-102:Ed2/Acc. to IEC 62386-207:Ed1 |
| Protection class | II |
| Type of protection | IP20 |

Logistical data

| | |
|-----------------------|--------------|
| Commodity code | 850440829000 |
|-----------------------|--------------|

Download Data

| File | |
|---|--|
|  | User instruction OPTOTRONIC LED Power Supply |
|  | Certificates OT ENEC 40038447 180520 |
|  | Declarations of conformity OTI DALI NFC S I CE 4169196 070420 |
|  | CAD data 3-dim PTi 20 I CAD3PDF |
|  | CAD data 3-dim PTi 20 I IGS |
|  | CAD data 3-dim PTi 20 I STEP |
|  | CAD data PDF PTi 20 I CAD2PDF |

Logistical Data

Product datasheet

| Product code | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume | Gross weight |
|---------------|------------------------------------|------------------------------|--------------------------------------|----------------------|--------------|
| 4062172114981 | OTi DALI 30/220...240/700 NFC I | Shipping carton box 20 | 428 mm x 263 mm x 87 mm | 9.79 dm ³ | 3607.00 g |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Data privacy

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.myosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.