


LINEARlight FLEX Protect Uniformity

LFP800S-G5

LFP1200S-G5

LFP2000S-G5

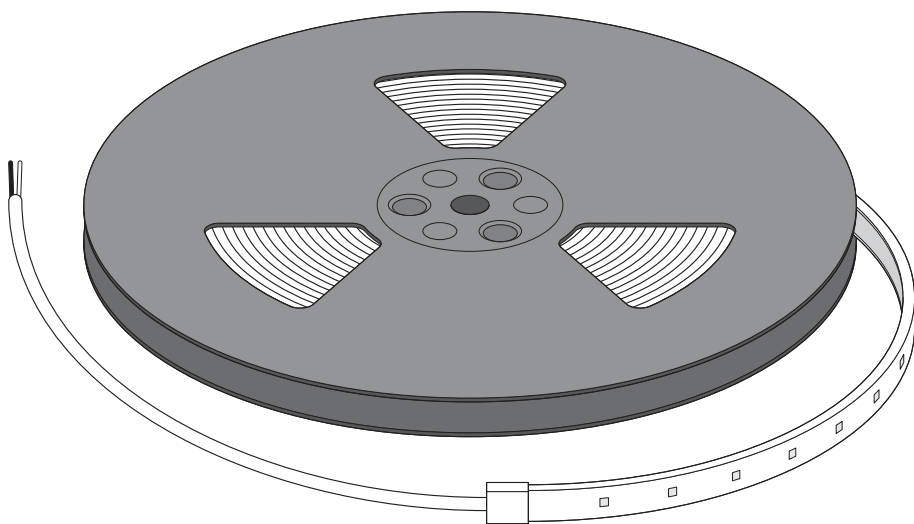

LFP800S

	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP800S-G5-825-10 L1	24	8.0	80.0	0.33	3.33	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-827-10 L1	24	7.2	72.0	0.30	3.00	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-830-10 L1	24	6.7	67.0	0.28	2.79	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-835-10 L1	24	6.2	62.0	0.26	2.58	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-840-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-847-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-857-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-880-10 L1	24	6.1	61.0	0.25	2.54	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-927-10 L1	24	9.2	92.0	0.38	3.83	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-930-10 L1	24	8.0	80.0	0.33	3.33	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-935-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-940-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-947-10 L1	24	7.5	75.0	0.31	3.13	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-957-10 L1	24	7.0	70.0	0.29	2.92	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-980-10 L1	24	7.0	70.0	0.29	2.92	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-927R-10 L1	24	9.5	95.0	0.40	3.96	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-930R-10 L1	24	8.3	83.0	0.35	3.46	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-935R-10 L1	24	8.3	83.0	0.35	3.46	120	-30...80	-40...85	≤ 10000mm
LFP800S-G5-940R-10 L1	24	7.3	73.0	0.30	3.04	120	-30...80	-40...85	≤ 10000mm

LFP1200S

	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP1200S-G5-825-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-827-10 L1	24	10.6	106.0	0.44	4.42	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-830-10 L1	24	9.8	98.0	0.41	4.08	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-835-10 L1	24	9.6	96.0	0.40	4.00	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-840-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-847-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-857-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-880-10 L1	24	9.4	94.0	0.39	3.92	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-927-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-930-10 L1	24	11.6	116.0	0.48	4.83	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-935-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-940-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-947-10 L1	24	10.9	109.0	0.45	4.54	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-957-10 L1	24	10.0	100.0	0.42	4.17	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-980-10 L1	24	10.0	100.0	0.42	4.17	120	-30...80	-40...85	≤ 10000mm
LFP1200S-G5-927R-05 L1	24	14.0	70.0	0.58	2.92	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-930R-05 L1	24	12.0	60.0	0.50	2.50	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-935R-05 L1	24	12.0	60.0	0.50	2.50	120	-30...80	-40...85	≤ 5000mm
LFP1200S-G5-940R-05 L1	24	10.6	53.0	0.44	2.21	120	-30...80	-40...85	≤ 5000mm

LFP2000S	V	W/m	W	A/m	A	∠	Tc/°C	Ts/°C	↔
LFP2000S-G5-825-05 L1	24	19.6	98.0	0.82	4.08	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-827-05 L1	24	18.1	90.5	0.75	3.77	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-830-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-835-05 L1	24	16.0	80.0	0.67	3.33	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-840-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-847-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-857-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-880-05 L1	24	15.2	76.0	0.63	3.17	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-927-05 L1	24	21.0	105.0	0.88	4.38	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-930-05 L1	24	19.6	98.0	0.82	4.08	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-935-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-940-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-947-05 L1	24	18.5	92.5	0.77	3.85	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-957-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-980-05 L1	24	17.3	86.5	0.72	3.60	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-927R-05 L1	24	21.0	105.0	0.88	4.38	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-930R-05 L1	24	19.5	97.5	0.81	4.06	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-935R-05 L1	24	19.5	97.5	0.81	4.06	120	-30...80	-40...85	≤ 5000mm
LFP2000S-G5-940R-05 L1	24	18.1	90.5	0.75	3.77	120	-30...80	-40...85	≤ 5000mm


IP67

ENDCAP-IP67 KIT 10PCS
EAN 6937186131850


10 x



1x




LTS-2000 SLIM Track
EAN 6937186141200



CONN-FLEX-IP67-2P KIT 5PCS
EAN 6937186141064

5x




IP67






JUMPER-FLEX-IP67-2P KIT 5PCS
EAN 6937186141040







5x










IP67









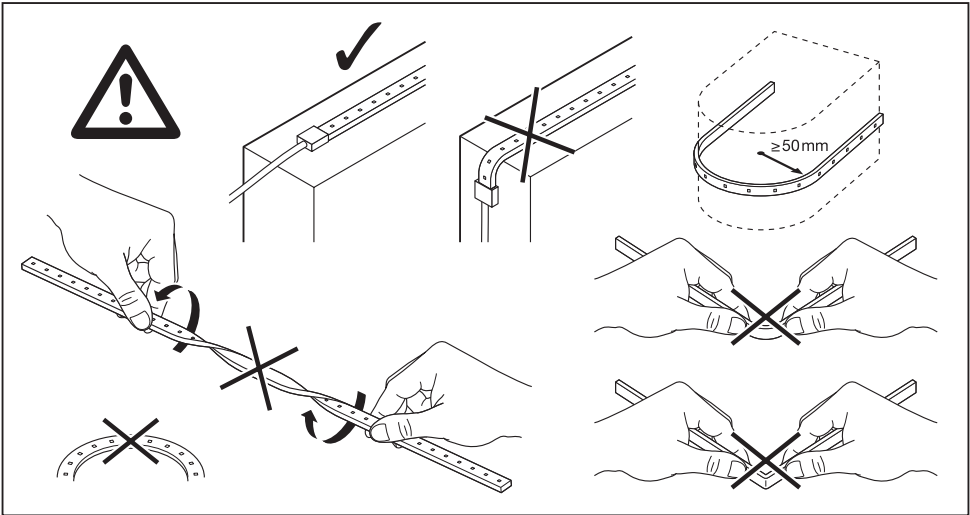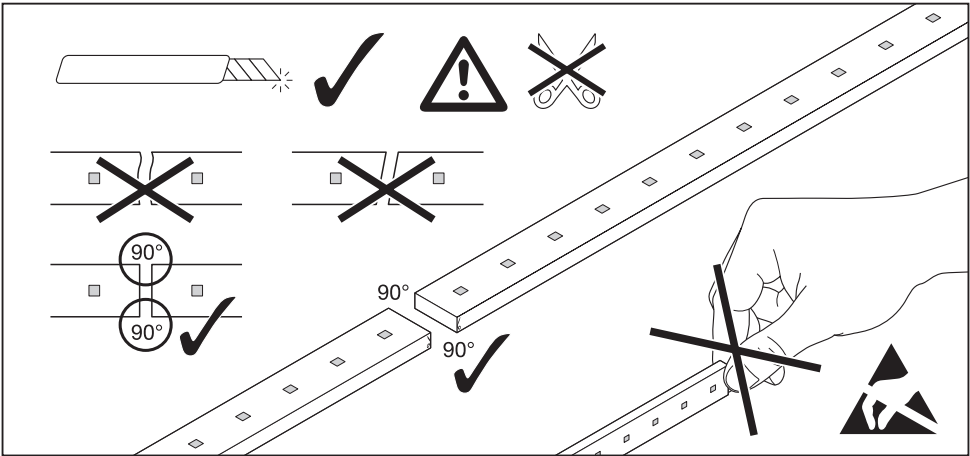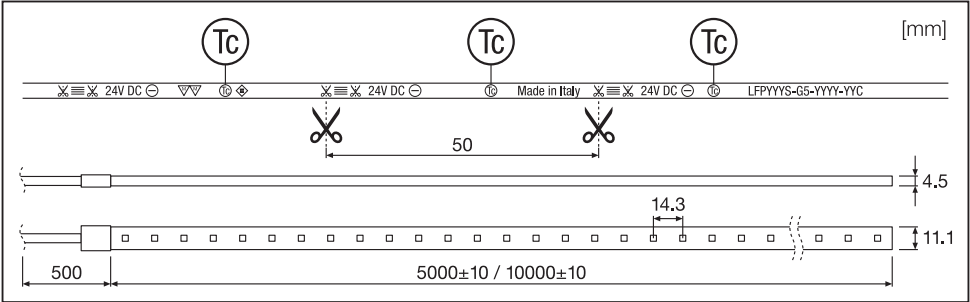

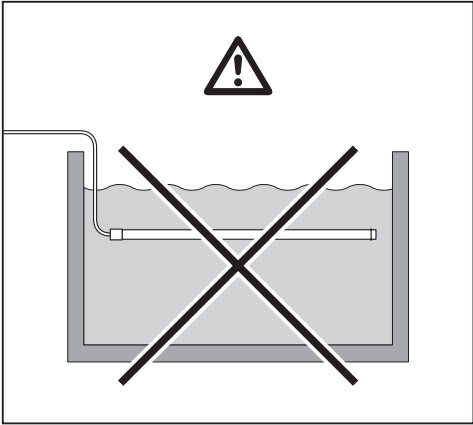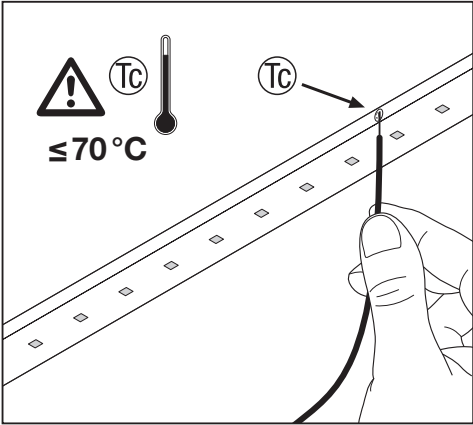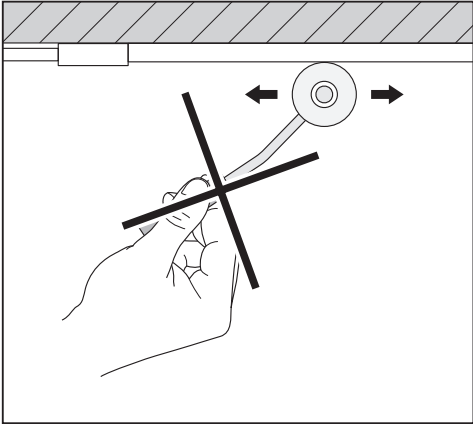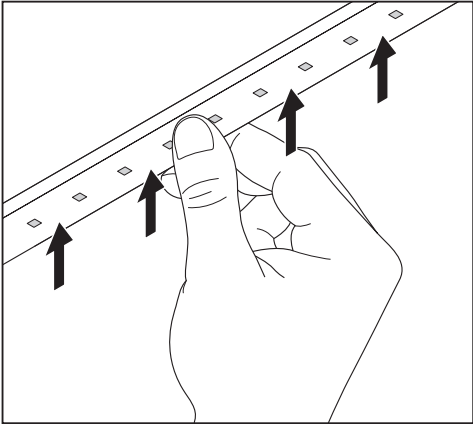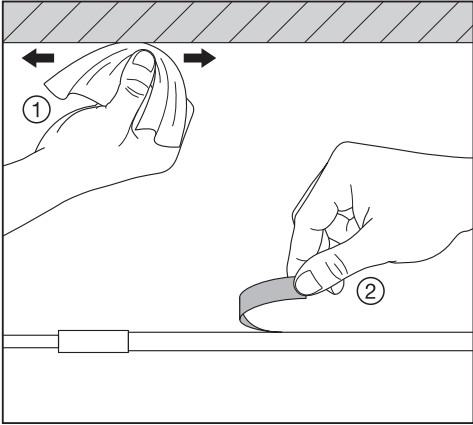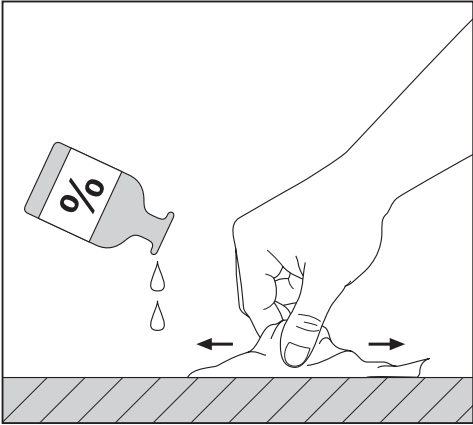


IP67

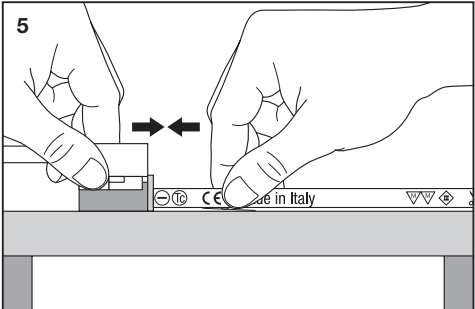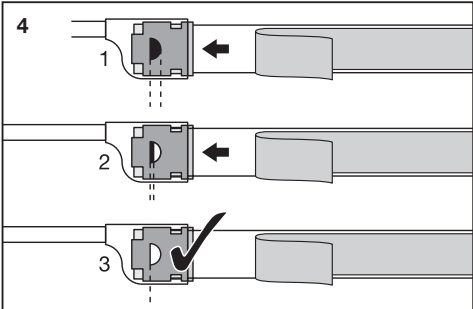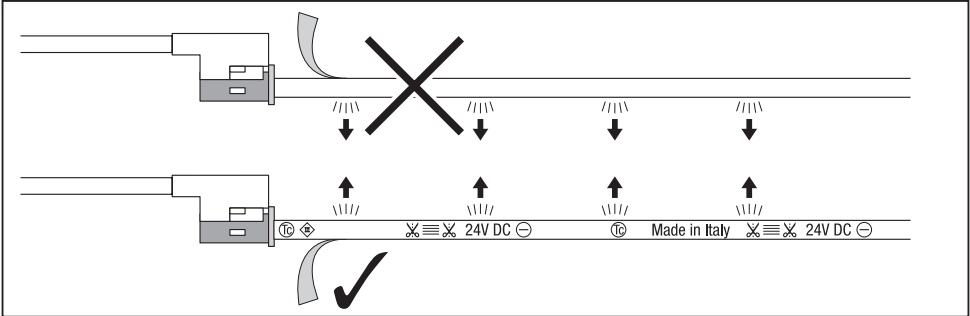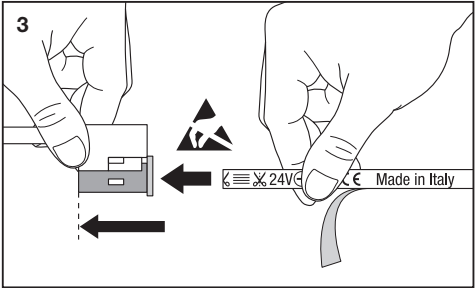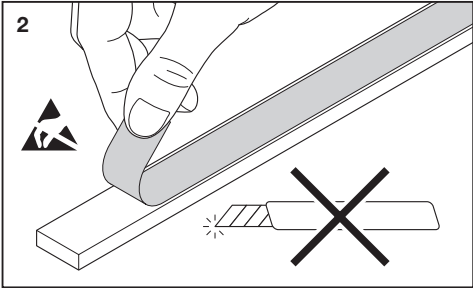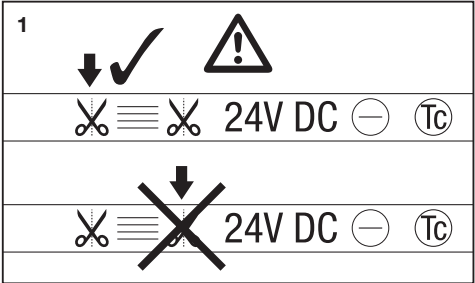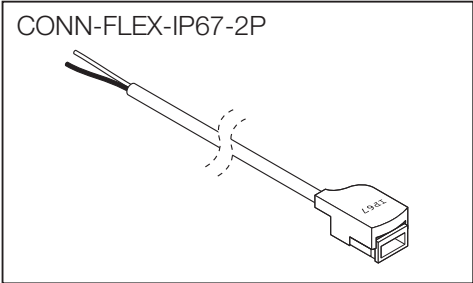


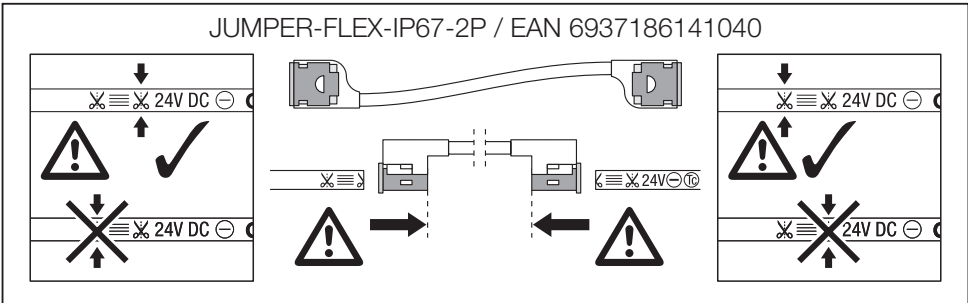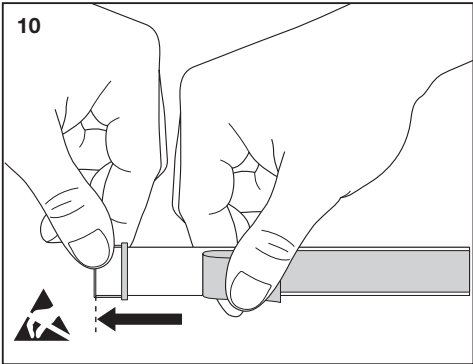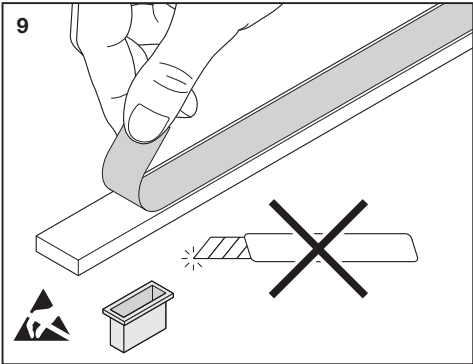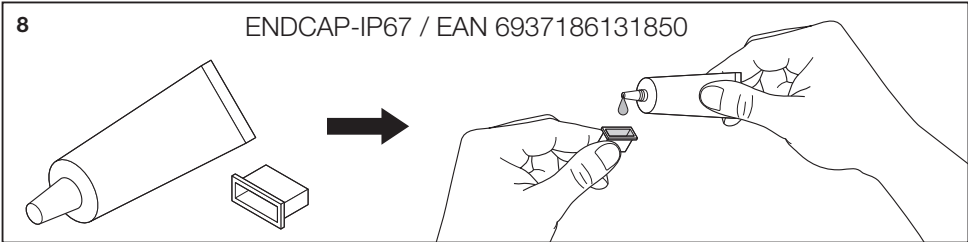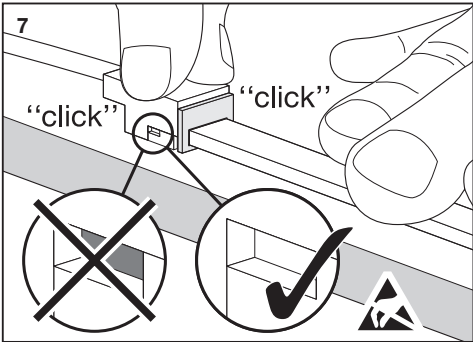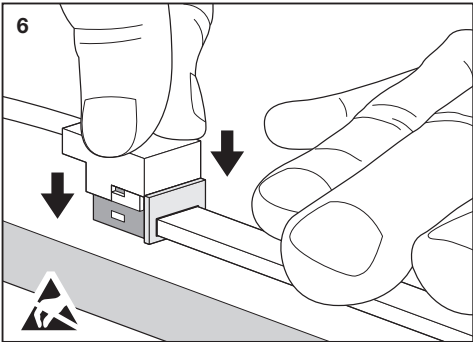

OPTIONAL*

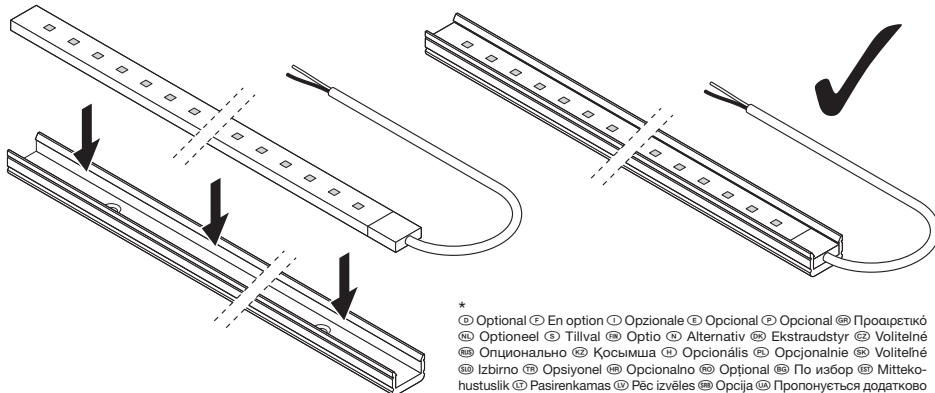

*
 ① Optional ② En option ③ Opzionale ④ Opcional ⑤ Opcional ⑥ Προαιρετικό
 ⑦ Optioneel ⑧ Tillval ⑨ Optio ⑩ Alternativ ⑪ Ekstraudstyr ⑫ Voliteľné
 ⑬ Опціонально ⑭ Қосымша ⑮ Opcionalis ⑯ Opcjonalnie ⑰ Voliteľné
 ⑱ Izbirno ⑲ Opsiyonel ⑳ Opcionalno ㉑ Opțional ㉒ По избор ㉓ Mittekohustuslik
 ㉔ Pasirenkamas ㉕ Pēc izvēles ㉖ Opcija ㉗ Пропонуються додатково



24V



SELV
SELV-Equivalent



Eye Safety RG 1 (low risk)*
EN 62471

*
 ① Augensicherheit RG 1 (geringes Risiko) ② Risque pour les yeux RG 1 (faible risque) ③ Sicurezza fotobiologica: gruppo di rischio 1 (rischio basso)
 ④ Protección ocular RG 1 (riesgo bajo) ⑤ Segurança para os olhos RG 1 (baixo risco) ⑥ Κατηγορία ασφαλείας οφθαλμών RG 1 (χαμηλού ρίσκου) ⑦ Veiligheid voor de ogen RG 1 (laag risico) ⑧ Ögonsäkerhet RG 1 (låg risk) ⑨ Silmien turvallisuus RG 1 (vähäinen vaara) ⑩ Öyesikkerhet RG 1 (liten risiko)
 ⑪ Öjesikkerhet RG 1 (lav risiko) ⑫ Bezpečnost očí RG 1 (riziková skupina 1 - nízké riziko) ⑬ Зашита глас RG 1 (низкий риск) ⑭ Кез қорғанысы RG 1 (төмен деңгейлі қауіп)
 ⑮ Szemészeti biztonság RG 1 kategória (alacsony kockázat) ⑯ Bezpieczeństwo dla oczu RG 1 (niskie ryzyko) ⑰ Bezpečnost očí RG 1 (riziková skupina 1 - nízké riziko)
 ⑱ Varnost oči RG 1 (nizko tveganje) ⑲ Göz Güvenliği RG 1 (düşük risk) ㉑ Sigurnost očiju RG 1 (nizak rizik) ㉒ Securitatea ochilor RG 1 (risc scăzut)
 ㉓ Безопасност за очите RG 1 (с нисък риск) ㉔ Ohutus silmadele RG 1 (madal risk) ㉕ Akių sauga RG 1 (maža rizika) ㉖ Acu drošība RG 1 (zems risks līmenis)
 ㉗ Zashita očiju RG 1 (mala opasnost) ㉘ Зхист очей RG 1 (низький ризик)

C[®] **AL** US

≤ 4.16A, suitable for damp and wet locations.
Class 2 power supply unit*

*
 ① Geeignet für feuchte und nasse Orte. Netzgerät der Klasse 2 ② Appropriate pour une utilisation dans des endroits humides ou mouillés. Bloc d'alimentation de classe 2 ③ Adatta per ambienti bagnati o umidi. Alimentatore Classe 2 ④ Apto para ubicaciones húmedas y mojadas. Fuente de alimentación Clase 2 ⑤ Apropriado para locais húmidos e molhados. Fonte de alimentação Classe 2 ⑥ Κατάλληλο για περιοχές με υγρασία. Μονάδα τροφοδοτικού κατηγορίας 2 ⑦ Geschikt voor klamme en vochtige locaties. Voedingskast klasse 2 ⑧ Lämpilijä für fuktiga och våta utrymmen. Strömförsörjningsenhet klass 2 ⑨ Sopli kosteisiin ja märkiin paikkoihin. Luokan 2 virtalähdetyksikkö ⑩ Egnat för fuktige og våte steder. Klasse 2 strømenhet ⑪ Egnat til fugtige og våde omgivelser. Strømforsyningsenhet i klasse 2 ⑫ Vhodné pro vlhká prostředí. Napájecí jednotka třídy 2 ⑬ Подходить для мест с высокой влажностью. Блок питания класса 2 ⑭ Дымқыл және ылғал ортаңар үшін қолайлы. 2-классқа жататын қуат блогы ⑮ Alkalmas nyirkos és nedves helyekre. 2. osztályba tartozó tápegység ⑯ Nadaje się do wilgotnych i mokrych pomieszczeń. Zasilacz klasy 2 ⑰ Vhodné do vlhkého prostredia. Napájacia jednotka triedy 2 ⑱ Primeno za vlažne in mokre lokacije. Napajalnik razreda 2 ⑲ Nemli ve ıslak yerler. Sınıf 2 güç kaynağı ünitesi ⑳ Pogodno za mokra i vlažna mjesta. Jedinica napajanja klase II ㉑ Apt pentru locuri umede și ude. Unitate de alimentare cu energie de clasă 2 ㉒ Подходящо за влажни и мокри помещения. Електрозахранващ модул клас 2 ㉓ Sobib niiskettese ja märgadesse kohtadesse. 2. klassi toiteallikas ㉔ Tinkama naudoti drėgnose ir šlapiose vietose. 2 klasės maitinimo blokas ㉕ Piemērots mitrām un slapjām vietām. 2. klases barošanas bloks ㉖ Pogodno za mokra i vlažna mesta. Jedinica za napajanje Klase 2 ㉗ Підходить для сирих і вологих місць. Блок живлення класу 2



IP67

C10449058
G15130809
23.04.25



Inventronics GmbH
Berliner Allee 65
86153 Augsburg
Germany
www.inventronicsglobal.com