


LINEARlight FLEX Protect Infinite

LFP500I-G1-48








LFP1500I-G1-48



LFP3000I-G1-48

LFP4000I-G1-48

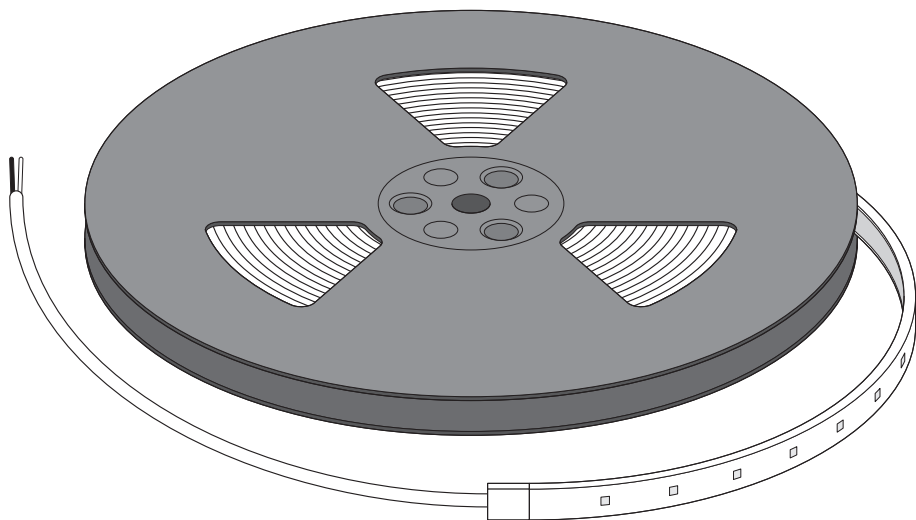

	V	W/m	W	A/m	A	∠	Tc[°C]	Ts[°C]	↔
LFP500I-G1	48	4.0	72.0	0.083	1.500	120°	≤ 80 °C	-40...+85 °C	≤ 18000 mm
LFP1500I-G1	48	9.8	117.6	0.204	2.450	120°	≤ 80 °C	-40...+85 °C	≤ 12000 mm
LFP3000I-G1	48	19.6	117.6	0.408	2.450	120°	≤ 80 °C	-40...+85 °C	≤ 6000 mm
LFP4000I-G1	48	26.4	158.4	0.550	3.300	120°	≤ 80 °C	-40...+85 °C	≤ 6000 mm

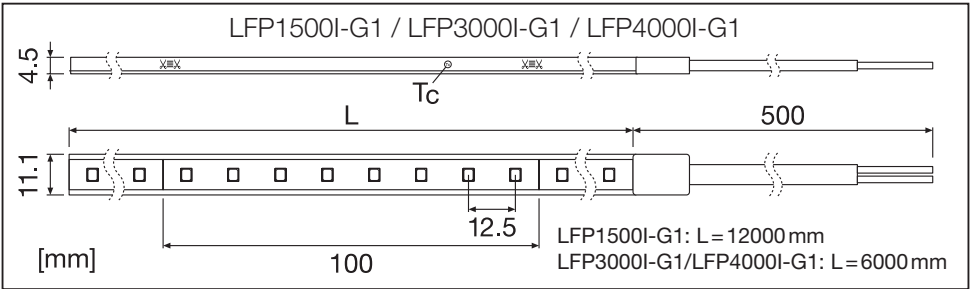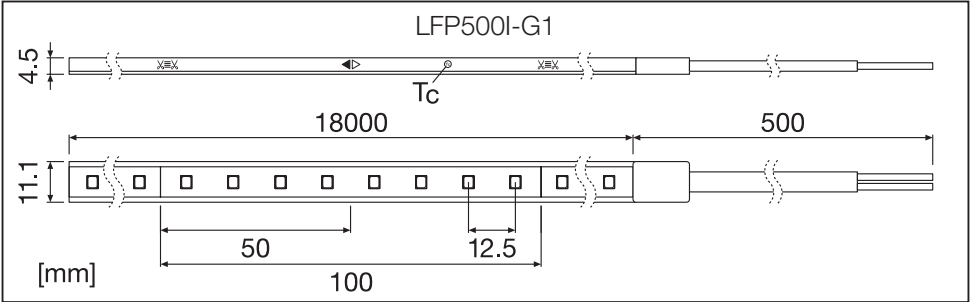

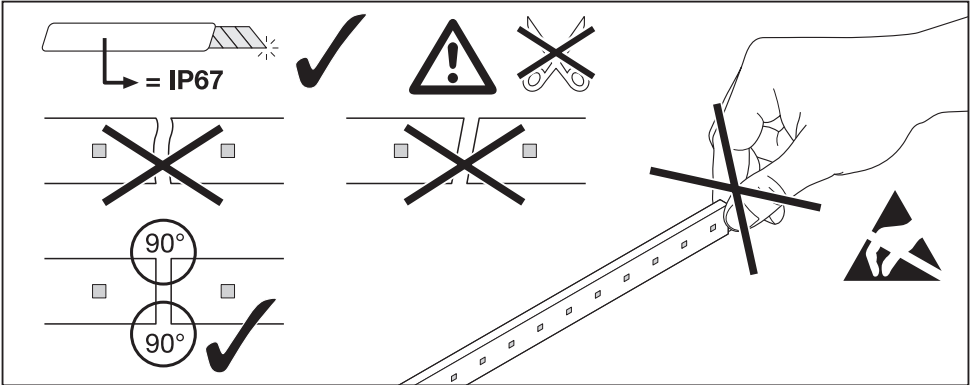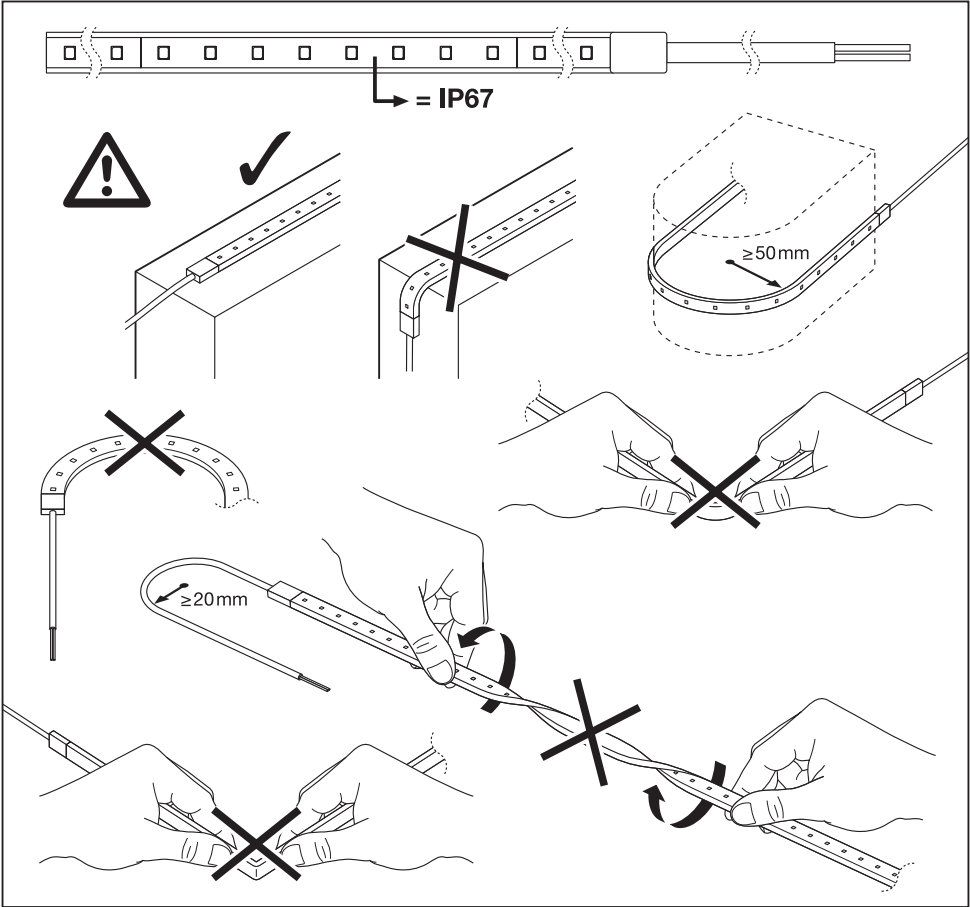

IP67

CONN-FLEX-IP67-2P KIT 5PCS
EAN 6937186141064

5x

IP67

Warning symbol: exclamation mark inside a triangle.

JUMPER-FLEX-IP67-2P KIT 5PCS
EAN 6937186141040

5x








IP67

Warning symbol: exclamation mark inside a triangle.


1

Warning symbols: exclamation mark inside a triangle, crossed-out scissors, and crossed-out arrows.


In case of cut module, make sure INVENTRONICS logo is present/visible in each installed module.¹⁾

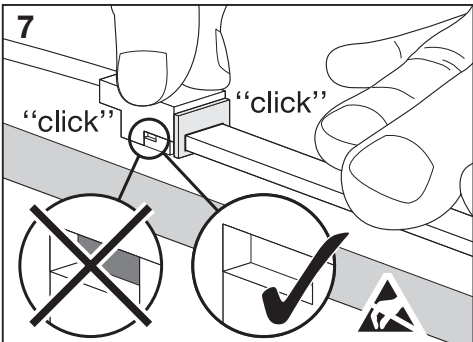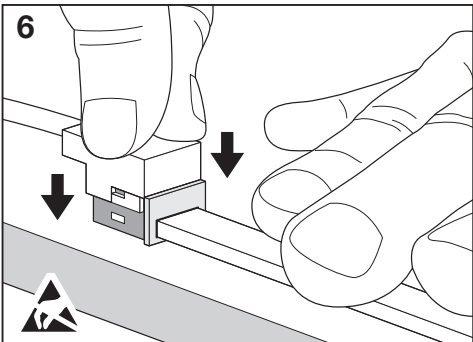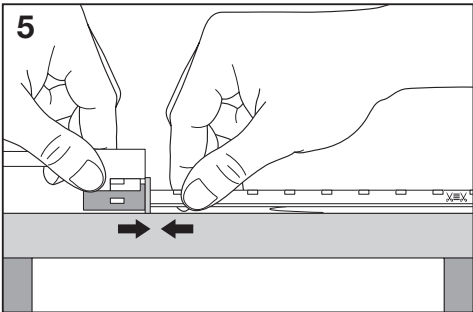
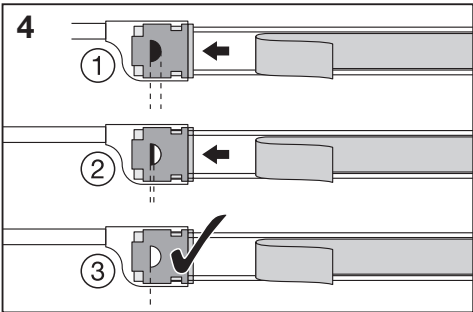
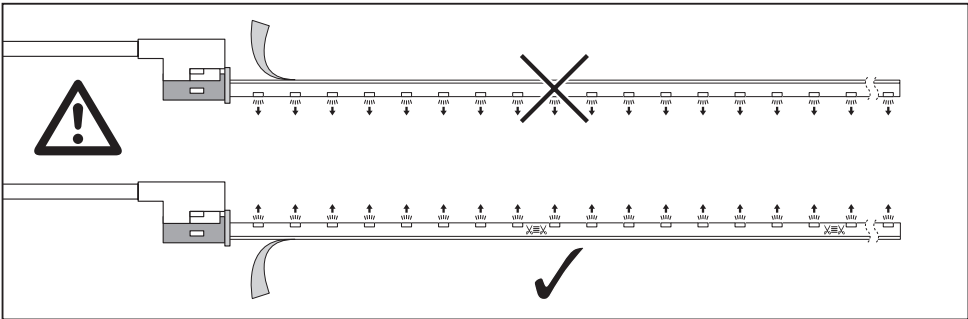
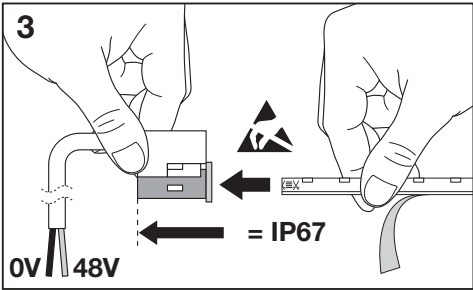
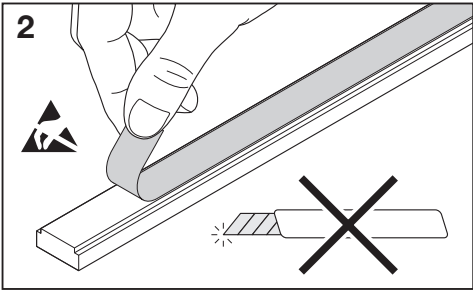


LFP500I-G1

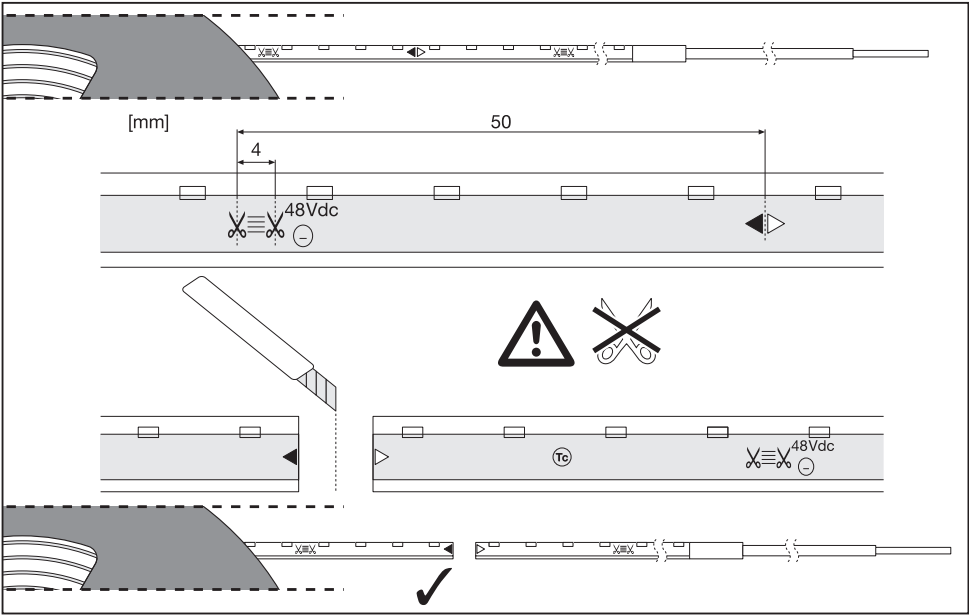


LFP500I-G1

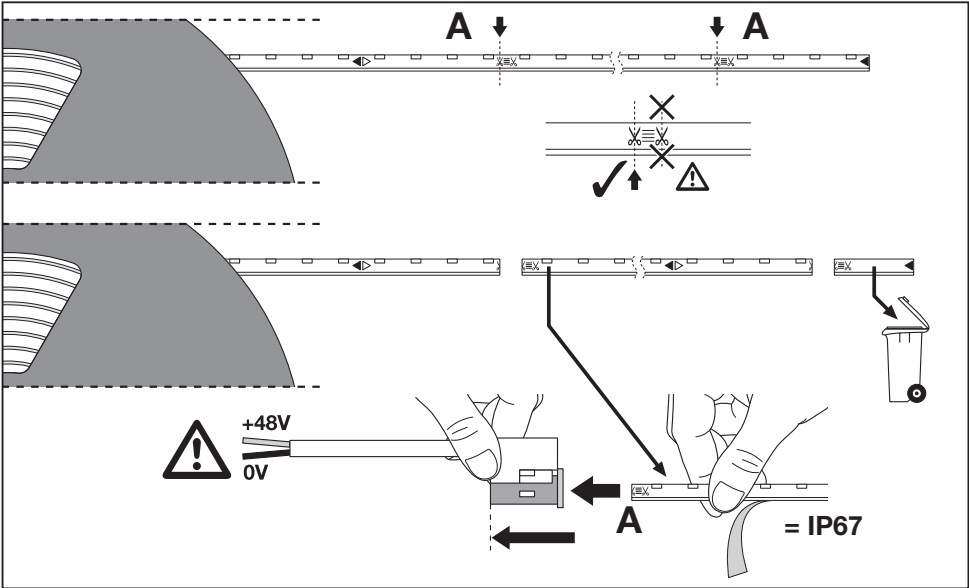

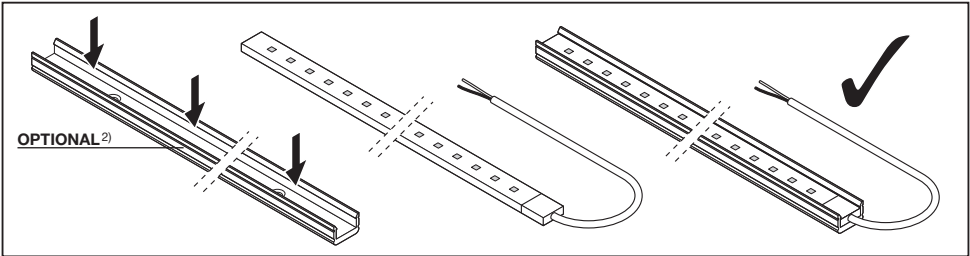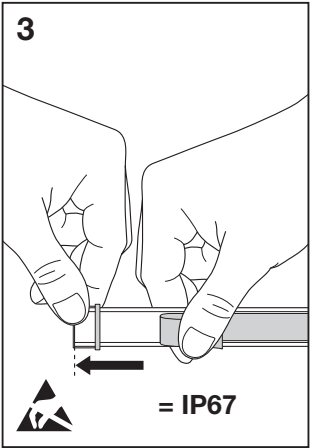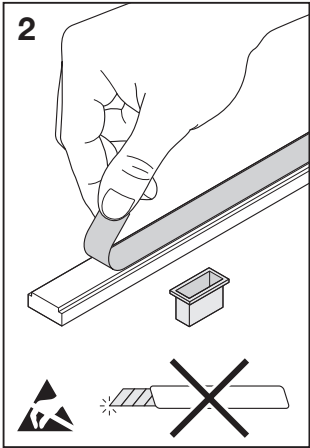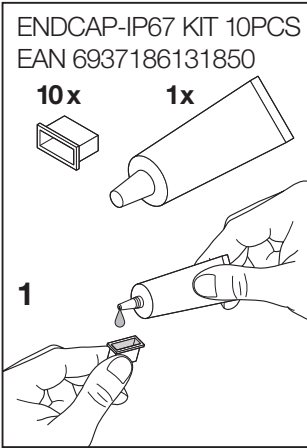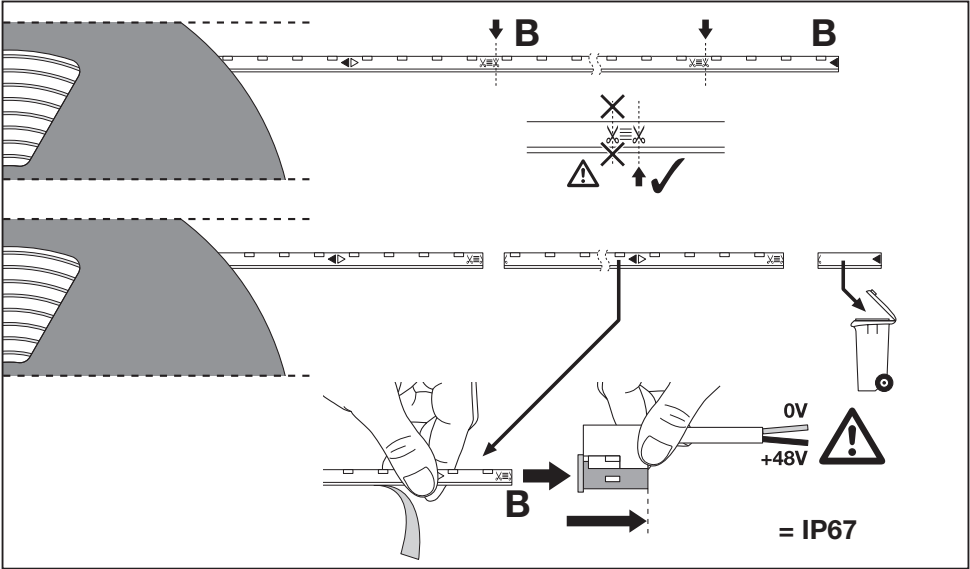

Ⓢ 1) In case of cut module, make sure INVENTRONICS logo is present/visible in each installed module. 2) Optional Ⓢ 1) En cas de découpe du module, assurez-vous que le logo Inventronics soit présent/visible sur chaque module installé. 2) En option Ⓢ 1) In caso di taglio del modulo, assicurarsi che il logo Inventronics sia presente/visibile su ogni modulo installato. 2) Opzionale Ⓢ 1) In geval van een ingekort module, zorg ervoor dat het Inventronics-logo zichtbaar is op elk geïnstalleerd module. 2) Optioneel Ⓢ 1) W przypadku przycięcia modułu należy upewnić się, że logo Inventronics jest obecne/widoczne na każdym zainstalowanym module. 2) Opcjonalnie Ⓢ 1) Modül kesildiği takdirde, her takılan modüle Inventronics logosunun mevcut/görünür olduğundan emin olun. 2) Opsiyonel

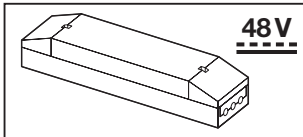

≤2.08 A, suitable for dry and damp locations.
Class 2 power supply unit *

*
Ⓢ Geeignet für trockene und feuchte Orte, Netzgerät der Klasse 2 Ⓢ Appropriate pour une utilisation dans des endroits secs et humides, Bloc d'alimentation de classe 2
Ⓢ Adatto per ambienti secchi o umidi. Alimentatore Classe 2 Ⓢ Geschikt voor droge en vochtige locaties. Voedingskast klasse 2 Ⓢ Nadaje się do suchych i wilgotnych pomieszczeń. Zasilacz klasy 2 Ⓢ Kuru ve nemli yerler için uygundur. Sınıf 2 güç kaynağı ünitesi

Ⓢ Εισαγωγέας: Inventronics Netherlands B.V., Polluxstraat 21, 5047RA Tilburg
Ⓢ Forgalmazó: Inventronics Netherlands B.V., Polluxstraat 21, 5047RA Tilburg
Ⓢ Inventronics Poland Sp. z o.o., Al. Jerozolimskie 94, 00-807 Warsaw, Poland
Ⓢ Inventronics Turkey Teknoloji Ticaret Limited Şirketi, Büyükdere Cad. Bahar Sok. River Plaza No: 13/5 Sisli 34394 Istanbul, Turkey
Ⓢ Uvoznik: Inventronics Netherlands B.V., Polluxstraat 21, 5047RA Tilburg
Ⓢ Inventronics Netherlands B.V., Polluxstraat 21, 5047RA Tilburg
Ⓢ Инвентроникс Нидерландия Б.В., Полуксстраат 21, 5047 РА Тилбург
Ⓢ Inventronics Guangzhou Technology Limited; Room 1105, Clifford Corporate Center Building, No. 15, Fuhua Road, Clifford Estate Panyu, Guangzhou, Guangdong province, China, Postal code: 511496
广州英飞特科技有限公司; 广州市番禺区钟村街祈福新邨福华路15号祈福集团中心1105室 邮编: 511496
Ⓢ INVENTRONICS MALAYSIA SDN. BHD., Kuala Lumpur, Penang, Tower A Vertical Business Suite
Ⓢ Inventronics Korea Inc, Seoul, Yeongdong-daero 417
인벤트로닉스코리아 유한회사, 서울특별시 강남구 테헤란로25길 6-9, 6층 674호
Ⓢ Ⓢ Ⓢ Ⓢ INVENTRONICS (HONG KONG) LIMITED, Room 30-108C, 29/F, Tower 5, The Gateway, 15 Canton Road, Tsim Sha Tsui, Hong Kong
Ⓢ INVENTRONICS SSL India Private Limited, 4th and 5th floor, B Wing, Valipeer Road, Kalyan West, Kalyan, Thane, Maharashtra-421301



IP67



C10449058
G15130864

16.07.25



Inventronics GmbH
Berliner Allee 65
86153 Augsburg
Germany

www.inventronicsglobal.com