

## LINEARlight FLEX Protect POWER 3000

LED modules for professional and industrial applications



### Areas of application

- Facade accent lighting
- Ceiling integration
- Wall integration
- Cove lighting
- Machine lighting
- Path lighting
- Suitable for outdoor use

### Product benefits

- High luminous flux
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Simple connection thanks to premounted connectors
- Extraordinary design and high quality materials
- Toolless connection only if using the optional CONNECTsystem
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

### Product features

- Flexible and cuttable LED strip
- Luminous flux: up to 3,000 lm/m
- Type of protection: IP67
- Dimmable with PWM technology
- Fine White (3.5 SDCM)



## Product family datasheet

### Technical data

#### Electrical data

| Product description              | Nominal voltage | Type of current | Nominal wattage per meter | Rated wattage | Input voltage range | Reverse Voltage |
|----------------------------------|-----------------|-----------------|---------------------------|---------------|---------------------|-----------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 24.0 V          | DC              | 28.9 W                    | 86.70 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-827-03 <sup>1)</sup> | 24.0 V          | DC              | 28.9 W                    | 86.70 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-830-03 <sup>1)</sup> | 24.0 V          | DC              | 28.9 W                    | 86.70 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-840-03 <sup>1)</sup> | 24.0 V          | DC              | 23.7 W                    | 71.10 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-860-03 <sup>1)</sup> | 24.0 V          | DC              | 21.8 W                    | 65.40 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-930-03 <sup>1)</sup> | 24.0 V          | DC              | 28.9 W                    | 86.70 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-940-03 <sup>1)</sup> | 24.0 V          | DC              | 28.9 W                    | 86.70 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-860-03 <sup>1)</sup> | 24.0 V          | DC              | 26.5 W                    | 79.50 W       | 23...24 V           | 25 V            |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 24.0 V          | DC              | 27.6 W                    | 82.80 W       | 23...24 V           | 25 V            |

<sup>1)</sup> See product remark

#### Photometrical data

| Product description              | Light color LED | Color temperature | Color rendering index Ra | Luminous flux per meter | Total useful luminous flux | Luminous efficacy |
|----------------------------------|-----------------|-------------------|--------------------------|-------------------------|----------------------------|-------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | White           | 2400 K            | >80                      | 2800 lm                 | 8400 lm                    | 97 lm/W           |
| LFP3000 -G3-827-03 <sup>1)</sup> | White           | 2700 K            | >80                      | 3000 lm                 | 9000 lm                    | 104 lm/W          |
| LFP3000 -G3-830-03 <sup>1)</sup> | White           | 3000 K            | >80                      | 3000 lm                 | 9000 lm                    | 104 lm/W          |
| LFP3000 -G3-840-03 <sup>1)</sup> | White           | 4000 K            | >80                      | 3000 lm                 | 9000 lm                    | 127 lm/W          |
| LFP3000 -G3-860-03 <sup>1)</sup> | White           | 6000 K            | >80                      | 2800 lm                 | 8400 lm                    | 128 lm/W          |
| LFP3000 -G3-930-03 <sup>1)</sup> | White           | 3500 K            | >90                      | 2850 lm                 | 8550 lm                    | 99 lm/W           |
| LFP3000 -G3-940-03 <sup>1)</sup> | White           | 4000 K            | >90                      | 3000 lm                 | 9000 lm                    | 104 lm/W          |
| LFP3000 -G3-860-03 <sup>1)</sup> | White           | 6000 K            | >90                      | 3000 lm                 | 9000 lm                    | 113 lm/W          |
| LFP3000 -G3-SW40 <sup>1)</sup>   | White           | 4300 K            | >90                      | 3000 lm                 | 9000 lm                    | 109 lm/W          |

| Product description              | Light color (designation) |
|----------------------------------|---------------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | Warm White                |
| LFP3000 -G3-827-03 <sup>1)</sup> | Warm White                |
| LFP3000 -G3-830-03 <sup>1)</sup> | Warm White                |
| LFP3000 -G3-840-03 <sup>1)</sup> | Cold White                |
| LFP3000 -G3-860-03 <sup>1)</sup> | Cold White                |
| LFP3000 -G3-930-03 <sup>1)</sup> | Warm White                |
| LFP3000 -G3-940-03 <sup>1)</sup> | Cold White                |
| LFP3000 -G3-860-03 <sup>1)</sup> | Cold White                |
| LFP3000 -G3-SW40 <sup>1)</sup>   | Cold White                |

<sup>1)</sup> See product remark

## Product family datasheet

### Light technical data

| Product description              | LED pitch | Beam angle |
|----------------------------------|-----------|------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-827-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-830-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-840-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-860-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-930-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-940-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-860-03 <sup>1)</sup> | 14.3 mm   | 120 °      |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 14.3 mm   | 120 °      |

<sup>1)</sup> See product remark

### LED module information

| Product description              | Number of LEDs per meter | Number of LEDs per smallest unit |
|----------------------------------|--------------------------|----------------------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-827-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-830-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-840-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-860-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-930-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-940-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-860-03 <sup>1)</sup> | 70                       | 7                                |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 70                       | 7                                |

<sup>1)</sup> See product remark

### Dimensions & weight


| Product description              | Length  | Length – smallest unit | Width   | Height | Cable length |
|----------------------------------|---------|------------------------|---------|--------|--------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-827-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-830-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-840-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-860-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-930-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-940-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-860-03 <sup>1)</sup> | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 3000 mm | 100.0 mm               | 11.1 mm | 3.7 mm | 500.0 mm     |

## Product family datasheet

| Product description              | Product weight |
|----------------------------------|----------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-827-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-830-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-840-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-860-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-930-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-940-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-860-03 <sup>1)</sup> | 195.00 g       |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 195.00 g       |

<sup>1)</sup> See product remark

### Product line drawing

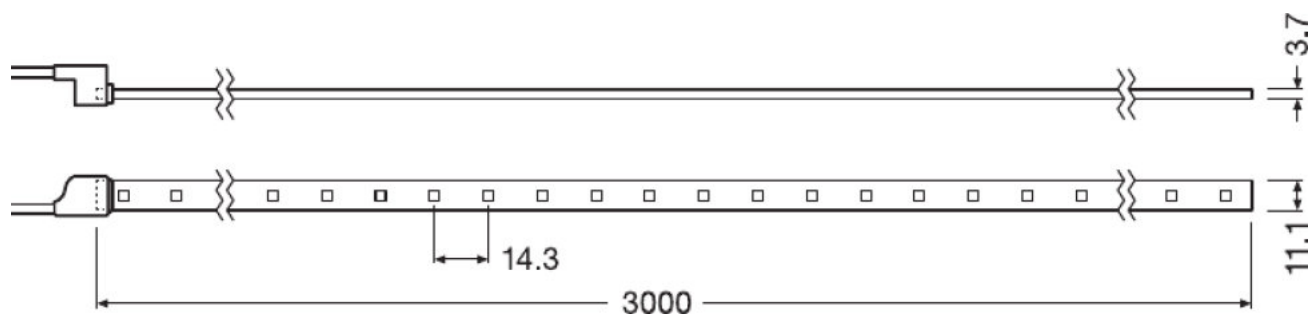

LFP3000 -G3-824-03, LFP3000 -G3-827-03, LFP3000 -G3-830-03, LFP3000 -G3-840-03, LFP3000 -G3-860-03, LFP3000 -G3-930-03, LFP3000 -G3-940-03, LFP3000 -G3-860-03, LFP3000 -G3-SW40

## Product family datasheet

### Colors & materials

| Product description              | Cover material | Body material |
|----------------------------------|----------------|---------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-827-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-830-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-840-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-860-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-930-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-940-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-860-03 <sup>1)</sup> | Silicone       | Silicone      |
| LFP3000 -G3-SW40 <sup>1)</sup>   | Silicone       | Silicone      |

<sup>1)</sup> See product remark

### Temperatures & operating conditions

| Product description              | Performance temp. acc. to IEC 62717 | Temperature range in operation at Tc point | Ambient temperature range  |
|----------------------------------|-------------------------------------|--|----------------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-827-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-830-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-840-03 <sup>1)</sup> | 55 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-860-03 <sup>1)</sup> | 55 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-930-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-940-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-860-03 <sup>1)</sup> | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 60 °C                               | -20...70 °C <sup>2)</sup>                  | -20...+50 °C <sup>3)</sup> |

<sup>1)</sup> See product remark

<sup>2)</sup> Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

<sup>3)</sup> Rated ambient temp. 25°C/Providing that temperature at Tc point is below max value during operation/Temperature ramping for environmental testing acc. to IEC 62717, 1K/min

## Product family datasheet

### Lifespan

| Product description              | Rated lamp life time  | Nominal lamp life time |
|----------------------------------|-----------------------|------------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-827-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-830-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-840-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-860-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-930-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-940-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-860-03 <sup>1)</sup> | 60000 h <sup>2)</sup> | 60000 h                |
| LFP3000 -G3-SW40 <sup>1)</sup>   | 60000 h <sup>2)</sup> | 60000 h                |

<sup>1)</sup> See product remark

<sup>2)</sup> L70/B50 at T<sub>c</sub> 40 °C

### Capabilities

| Product description              | Dimmable | Lowest bending radius | Self-adhesive |
|----------------------------------|----------|-----------------------|---------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-827-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-830-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-840-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-860-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-930-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-940-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-860-03 <sup>1)</sup> | Yes      | 50 mm                 | Yes           |
| LFP3000 -G3-SW40 <sup>1)</sup>   | Yes      | 50 mm                 | Yes           |

| Product description              | With connection set | With end piece |
|----------------------------------|---------------------|----------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-827-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-830-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-840-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-860-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-930-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-940-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-860-03 <sup>1)</sup> | Yes                 | Yes            |
| LFP3000 -G3-SW40 <sup>1)</sup>   | Yes                 | Yes            |

<sup>1)</sup> See product remark

## Product family datasheet

### Certificates & standards

| Product description              | Energy efficiency class | Energy consumption | Standards   |
|----------------------------------|-------------------------|--------------------|---|
| LFP3000 -G3-824-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 95 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-827-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 95 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-830-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 95 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-840-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 78 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-860-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 72 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-930-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 95 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-940-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 95 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-860-03 <sup>1)</sup> | A+ <sup>2)</sup>        | 87 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |
| LFP3000 -G3-SW40 <sup>1)</sup>   | A+ <sup>2)</sup>        | 91 kWh/1000h       | CE; ENEC 10 VDE/EAC/UL Recognized component according UL 8750 |

| Product description              | Type of protection |
|----------------------------------|--------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-827-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-830-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-840-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-860-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-930-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-940-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-860-03 <sup>1)</sup> | IP67               |
| LFP3000 -G3-SW40 <sup>1)</sup>   | IP67               |

<sup>1)</sup> See product remark

<sup>2)</sup> Applicable on smallest operable unit

## Product family datasheet

### Logistical data

| Product description              | Temperature range at storage |
|----------------------------------|------------------------------|
| LFP3000 -G3-824-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-827-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-830-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-840-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-860-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-930-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-940-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-860-03 <sup>1)</sup> | -40...85 °C                  |
| LFP3000 -G3-SW40 <sup>1)</sup>   | -40...85 °C                  |

<sup>1)</sup> See product remark

### Product remark

Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information, see [www.osram.com/led-systems/](http://www.osram.com/led-systems/)All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values

### Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Quick installation with optional SLIM TRACK System
- Perfectly matched to OPTOTRONIC 24 V electronic control gears


### Application advice

For more detailed application information and graphics please see product datasheet.

### Sales and Technical Support

Sales and Technical Support [www.osram.com](http://www.osram.com)

### Download Data

| File   |
|--|
|  Brochures<br>Light is freedom of design (EN) |



## Product family datasheet

|   |   |
|---|---|
|    | Certificates<br>EAC Certificate                         |
|    | Certificates<br>VDE ENEC+ Certificate LFP3000-G3        |
|    | Certificates<br>ENEC10_VDE Certificate                  |
|    | Certificates<br>UL Certificate                          |
|    | Declarations of conformity<br>Declaration of conformity |
|    | Declarations of conformity<br>Manufacturer declaration  |
|    | Eulumdat<br>Eulumdat LFP3000-G3-824                     |
|    | IES data<br>IES LFP3000-G3-824                          |
|    | Eulumdat<br>Eulumdat LFP3000-G3-827                     |
|    | IES data<br>IES LFP3000-G3-827                          |
|  | Eulumdat<br>Eulumdat LFP3000-G3-830                     |
|  | IES data<br>IES LFP3000-G3-830                          |
|  | Eulumdat<br>Eulumdat LFP3000-G3-840                     |
|  | IES data<br>IES LFP3000-G3-840                          |
|  | Eulumdat<br>Eulumdat LFP3000-G3-860                     |
|  | IES data<br>IES LFP3000-G3-860                          |
|  | User instruction<br>LINEARlight FLEX Protect POWER      |
|  | Eulumdat<br>Eulumdat LFP3000-G3-930                     |
|  | IES data<br>IES LFP3000-G3-930                          |
|  | Eulumdat<br>Eulumdat LFP3000-G3-940                     |
|  | IES data<br>IES LFP3000-G3-940                          |
|  | Eulumdat<br>Eulumdat LFP3000-G3-960                     |
|  | IES data<br>IES LFP3000-G3-960                          |

## Product family datasheet



Eulumdat  
Eulumdat LFP3000-G3-SW40



IES data  
IES LFP3000-G3-SW40

### Logistical Data

| Product code  | Product description | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Volume                | Gross weight |
|---------------|---------------------|------------------------------|--------------------------------------|-----------------------|--------------|
| 4052899481299 | LFP3000 -G3-824-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481312 | LFP3000 -G3-827-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481336 | LFP3000 -G3-830-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481350 | LFP3000 -G3-840-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481374 | LFP3000 -G3-860-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481398 | LFP3000 -G3-930-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481411 | LFP3000 -G3-940-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899481435 | LFP3000 -G3-860-03  | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |
| 4052899501898 | LFP3000 -G3-SW40    | Shipping carton box<br>8     | 365 mm x 286 mm x 366 mm             | 38.21 dm <sup>3</sup> | 5778.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### References / Links

System configurator tool is available online at <https://flex.osram.info/en/flex-configurator>

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.