


LINEARlight FLEX Diffuse Side

LED modules for professional and industrial applications Notice: New Generation or successor products available!

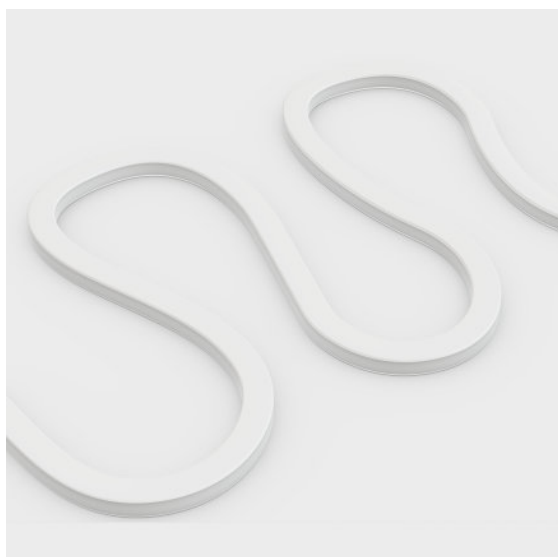

Product family features

- Diffused light lines without visible spots
- Flexible and cuttable module to support design freedom
- Long operational length per single power feed up to 10 m
- Ideal for luminaire designs
- Extra strong self-adhesive backside for easy mounting
- 24 V technology for easy dimensioning
- Recommended in system use with OPTOTRONIC
- Increased reliability due to single piece reel-to-reel technology
- Dimmable with PWM technology

Product family benefits

- IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Areas of application

- Individual and customized luminaires
- Organic shaped luminaires
- Architectural Integration – e.g. coves, walls
- Object integration – e.g. handrails
- Signage and illuminated advertising



Product family datasheet

Technical data

Product description	Electrical data	Photometrical data	Dimensions & weight			
	Nominal wattage per meter	Standard deviation of color matching	Height	Width	Length	Product weight
LFD400S -G2-824-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-827-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-830-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-840-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-924-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-927-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-930-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD400S -G2-940-10	8.9 W	≤3 sdcM	10.8 mm	14.1 mm	10000 mm	1900.00 g
LFD600S -G2-824-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-827-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-830-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-840-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-924-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-927-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-930-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G2-940-06	13.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD1000S -G2-824-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-830-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-827-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-840-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-927-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-930-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD1000S -G2-940-04	21 W	≤3 sdcM	10.8 mm	14.1 mm	4000 mm	695.00 g
LFD400S -G1-830-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-835-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-840-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-850-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-924-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-865-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-930-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-935-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-940-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD400S -G1-965-06	7.2 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-827-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-835-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-840-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-865-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-924-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-930-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g

Product family datasheet

Product description	Electrical data	Photometrical data	Dimensions & weight			
	Nominal wattage per meter	Standard deviation of color matching	Height	Width	Length	Product weight
LFD600S -G1-935-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-940-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g
LFD600S -G1-965-06	11.5 W	≤3 sdcM	10.8 mm	14.1 mm	6000 mm	1040.00 g

Product description	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LFD400S -G2-824-10	853951000000	24-01-2023	4062172273992	Lead
LFD400S -G2-827-10	853951000000	24-01-2023	4062172274012	Lead
LFD400S -G2-830-10	853951000000	24-01-2023	4062172274036	Lead
LFD400S -G2-840-10	853951000000	24-01-2023	4062172274074	Lead
LFD400S -G2-924-10	853951000000	24-01-2023	4062172274111	Lead
LFD400S -G2-927-10	853951000000	24-01-2023	4062172274135	Lead
LFD400S -G2-930-10	853951000000	24-01-2023	4062172274159	Lead
LFD400S -G2-940-10	853951000000	21-04-2023	4062172274197	Lead
LFD600S -G2-824-06	853951000000	24-01-2023	4062172270618	Lead
LFD600S -G2-827-06	853951000000	24-01-2023	4062172270632	Lead
LFD600S -G2-830-06	853951000000	24-01-2023	4062172270656	Lead
LFD600S -G2-840-06	853951000000	24-01-2023	4062172270694	Lead
LFD600S -G2-924-06	853951000000	24-01-2023	4062172270731	Lead
LFD600S -G2-927-06	853951000000	24-01-2023	4062172270755	Lead
LFD600S -G2-930-06	853951000000	24-01-2023	4062172270779	Lead
LFD600S -G2-940-06	853951000000	24-01-2023	4062172270816	Lead
LFD1000S -G2-824-04	853951000000	24-01-2023	4062172271097	Lead
LFD1000S -G2-830-04	853951000000	24-01-2023	4062172271110	Lead
LFD1000S -G2-827-04	853951000000	24-01-2023	4062172271134	Lead
LFD1000S -G2-840-04	853951000000	24-01-2023	4062172271172	Lead
LFD1000S -G2-927-04	853951000000	24-01-2023	4062172271233	Lead
LFD1000S -G2-930-04	853951000000	24-01-2023	4062172271257	Lead
LFD1000S -G2-940-04	853951000000	24-01-2023	4062172271295	Lead
LFD400S -G1-830-06	853951000000	08-02-2023	4052899581807	Lead
LFD400S -G1-835-06	853951000000	08-02-2023	4062172001052	Lead
LFD400S -G1-840-06	853951000000	17-02-2023	4052899581821	No declarable substances contained
LFD400S -G1-850-06	853951000000	08-02-2023	4062172007658	Lead
LFD400S -G1-924-06	853951000000	21-04-2023	4062172025621	Lead
LFD400S -G1-865-06	853951000000	08-02-2023	4052899581845	Lead
LFD400S -G1-930-06	853951000000	28-04-2023	4062172025645	Lead
LFD400S -G1-935-06	853951000000	08-02-2023	4062172025669	Lead
LFD400S -G1-940-06	853951000000	08-02-2023	4062172025683	Lead
LFD400S -G1-965-06	853951000000	08-02-2023	4062172025706	Lead

Product family datasheet

Product description	Logistical data	Environmental information Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)		
	Commodity code	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
LFD600S -G1-827-06	853951000000	08-02-2023	4052899582026	Lead
LFD600S -G1-835-06	853951000000	08-02-2023	4062172001090	Lead
LFD600S -G1-840-06	940540399000	08-02-2023	4052899582064	Lead
LFD600S -G1-865-06	853951000000	08-02-2023	4052899582088	Lead
LFD600S -G1-924-06	853951000000	08-02-2023	4062172025829	Lead
LFD600S -G1-930-06	853951000000	08-02-2023	4062172025843	Lead
LFD600S -G1-935-06	853951000000	08-02-2023	4062172025867	Lead
LFD600S -G1-940-06	853951000000	08-02-2023	4062172025881	Lead
LFD600S -G1-965-06	853951000000	08-02-2023	4062172025904	Lead

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD400S -G2-824-10	7439-92-1	In work	
LFD400S -G2-827-10	7439-92-1	In work	
LFD400S -G2-830-10	7439-92-1	In work	
LFD400S -G2-840-10	7439-92-1	In work	
LFD400S -G2-924-10	7439-92-1	In work	
LFD400S -G2-927-10	7439-92-1	In work	
LFD400S -G2-930-10	7439-92-1	In work	
LFD400S -G2-940-10	7439-92-1	4ccfb56e-1d50-4a22-825a-c0e8f867f700	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G2-824-06	7439-92-1	In work	
LFD600S -G2-827-06	7439-92-1	In work	
LFD600S -G2-830-06	7439-92-1	In work	
LFD600S -G2-840-06	7439-92-1	In work	
LFD600S -G2-924-06	7439-92-1	In work	
LFD600S -G2-927-06	7439-92-1	In work	
LFD600S -G2-930-06	7439-92-1	In work	
LFD600S -G2-940-06	7439-92-1	In work	
LFD1000S -G2-824-04	7439-92-1	In work	
LFD1000S -G2-830-04	7439-92-1	In work	
LFD1000S -G2-827-04	7439-92-1	In work	
LFD1000S -G2-840-04	7439-92-1	In work	
LFD1000S -G2-927-04	7439-92-1	In work	
LFD1000S -G2-930-04	7439-92-1	In work	
LFD1000S -G2-940-04	7439-92-1	In work	

Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD400S -G1-830-06	7439-92-1	9ebcfb5f-2bd5-4e29- b25b-e355f1c82a80	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-835-06	7439-92-1	c91778c2-d012- 4b98-8f3d- d5adc1f1ef7d	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-840-06		No declarable substances contained	
LFD400S -G1-850-06	7439-92-1	ce849e74-64c2-4fe2- b87d-8b996e933c78	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-924-06	7439-92-1	8cce7612-9dee-4bef- 8811-654cb49fcfea	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-865-06	7439-92-1	a2d8b484-2bd1- 4499-bcbf- 8c6c4ec8255c	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-930-06	7439-92-1	5f18beb9-070c- 4567-ba8b- 9f67c4498bbf	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-935-06	7439-92-1	ecc4725-bd80-49ef- 9a07-7de46cd5c33f	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD400S -G1-940-06	7439-92-1	6ad383d1-9cf7- 4515-9567- 3937e4f552b8	The identification of the Candidate List substance is sufficient to allow safe use of the article.


Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD400S -G1-965-06	7439-92-1	8ce72fe2-abf7-4838-87e6-6b6f2d06da73	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-827-06	7439-92-1	cd712058-2fc2-435e-85d2-b9803b8f0f68	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-835-06	7439-92-1	dbd03055-7f0e-413c-86c3-6f4704118d1e	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-840-06	7439-92-1	bde47b89-55b9-4060-b752-9c64ae38f841	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-865-06	7439-92-1	92cbaf88-77c6-4e13-af42-edeb78b7555b6	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-924-06	7439-92-1	33f76d90-859f-4d55-8f68-c173e7b58326	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-930-06	7439-92-1	67a1dec7-c74e-4c6b-b8b5-3e7bb52f936d	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-935-06	7439-92-1	efa0a505-93c1-44ce-bdbc-c3f022d39aec	The identification of the Candidate List substance is sufficient to allow safe use of the article.
LFD600S -G1-940-06	7439-92-1	1aaea7b2-4c31-45cc-ba3f-91dd3337ad71	The identification of the Candidate List substance is sufficient to allow safe use of the article.


Product family datasheet

Product description	CAS No. of substance 1	Declaration No. in SCIP database	Safe Use Instruction
LFD600S -G1-965-06	7439-92-1	91e77c3f-333b- 48b1-89e4- 5d25dc339743	The identification of the Candidate List substance is sufficient to allow safe use of the article.

Product family datasheet

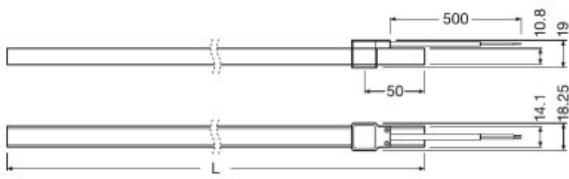

LINEARlight FLEX DIFFUSE Side line drawing

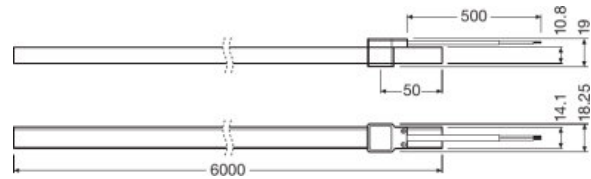

LINEARlight Flex Diffuse 400 and 600 SIDE

Application advice

For more detailed application information and graphics please see product datasheet.

Product family datasheet

Additional product information











- Some LED modules are equipped with a self-adhesive tape for attaching the LED module to suitable materials, such as aluminum profiles, which must be clean and free of oil or silicone coatings, as well as other dirt/dust particles. The adhesive tape is intended for single use and if removed may damage the material to which it is stuck and the LED module itself, which must then be scrapped. Use the adhesive tape when the installation material temperature is in the 18 °C...35 °C range. Complete adhesion takes up to 72 h.
- LED modules are designed for static installations in accordance with IPC 6013C – Use A. Take material vibrations, repetitive torsion, and elongation/compression into account.
- If the operating environment covers a broad temperature range (e.g. outdoor applications) and the operating length is longer than 2 m, the use of adequate mounting surfaces is required. The use of an additional thicker adhesive tape between LED module and mounting surface is also recommended in order to absorb the stress of any mismatch in expansion. Assure enough space for module expansion with increasing temperature.
- The manufacturer is not responsible for damage due to chemical corrosion. The user must provide suitable protection against corrosive agents such as moisture and condensation and any other harmful elements/compounds. Make certain to avoid corrosive atmospheres. According to the current state of LED technology, hydrogen sulfide (H₂S) causes accelerated corrosion which leads to shortened lifetime or premature failure. Sources of H₂S may be rubber, foam rubber, soft-foam tapes, rubber-based sealing, natural sources (e.g. sulfur springs), etc. To avoid H₂S from sulfur-vulcanized rubber use silicon-based materials or peroxide-crosslinked rubber instead. Follow the recommendations in the material datasheet of the rubber supplier.
- IP00 LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Conformal coating treatment is possible, however materials must be selected properly in order to avoid product damage or impaired performance; the user must also completely seal the cut parts (ends/edges).
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable IP protection class.
- Consult OSRAM Technical Service for further advice.
- Only a qualified electrician may install the module.
- Handle with care and ensure that there is no mechanical product damage, including damage to invisible internal electronics parts.
- Exceeding maximum operating and storage temperature ratings can reduce the expected lifetime or even destroy the LED module. The temperature of the LED module must be measured at the T_c-point in accordance with EN 60598-1 under steady-state conditions, considering the worst case; drive all channels at 100 % power. Refer to the product drawing for the exact location of the T_c-point.
- Exceeding the maximum ratings for the operating voltage causes hazardous overload and will likely destroy the LED module.
- Installation of LED modules and connection to the power supply must comply with all applicable electrical and safety standards.
- Observe correct polarity and wiring diagrams! Incorrect polarity or wrong wiring can cause unpredictable permanent damage or even failure of the product.
- Never exceed the maximum operable length, including daisy-chaining connections.
- Always ensure electrical isolation between the LED module and the mounting surface, especially in the vicinity of connections or cut ends.
- IP00 LED modules are ESD-sensitive; take adequate precautions during installation and operation of the products.
- Use only SELV LED drivers in accordance with applicable lighting standards and LED module ratings. In order to safely operate OSRAM LED modules it is necessary to supply them with an electronically stabilized power supply providing protection against short circuits, overload and overheating. To simplify the approval process of the luminaire/installation, the electronic power supplies control gear for LED modules must bear the CE and ENEC marking. In Europe the Declarations of Conformity must include at least the following standards: EN 61347-2-13, EN 55015, EN 61547 and EN 61000-3-2. ENEC certification will be based on EN 61347-2-13 and EN 62384. OSRAM OPTOTRONIC LED drivers comply with all relevant standards and guarantee safe operation; see the relevant brochure for more detailed information about OSRAM OPTOTRONIC.
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Sales and Technical Support
























Product family datasheet

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Side_G2_Specification Sheet (EN)
	Brochures App Guide LINEARlight Flex Diffuse (EN)
	Certificates LF ENEC 0040052516 241022.
	Certificates LINEARlight Flex DP UL 4413809 200622
	Eulumdat LFD400S-G2-824-10_ldt
	IES data LFD400S-G2-824-10_IES
	Eulumdat LFD400S-G2-827-10_ldt
	IES data LFD400S-G2-827-10_IES
	Eulumdat LFD400S-G2-830-10_ldt
	IES data LFD400S-G2-830-10_IES
	Eulumdat LFD400S-G2-865-10_ldt
	IES data LFD400S-G2-865-10_IES
	Eulumdat LFD1000S-G2-924-10_ldt
	Eulumdat LFD400S-G2-927-10_ldt
	IES data LFD1000S-G2-924-10_IES
	IES data LFD400S-G2-927-10_IES
	Eulumdat LFD400S-G2-930-10_ldt
	IES data LFD400S-G2-930-10_IES

Product family datasheet

	Eulumdat LFD400S-G2-935-10_ldt
	IES data LFD400S-G2-935-10_IES
	Eulumdat LFD400S-G2-965-10_ldt
	IES data LFD400S-G2-965-10_IES
	Eulumdat LFD600S-G2-824-10_ldt
	IES data LFD600S-G2-824-10_IES
	Eulumdat LFD600S-G2-827-10_ldt
	IES data LFD600S-G2-827-10_IES
	Eulumdat LFD600S-G2-830-10_ldt
	IES data LFD600S-G2-830-10_IES
	Eulumdat LFD600S-G2-840-10_ldt
	IES data LFD600S-G2-840-10_IES
	Eulumdat LFD600S-G2-924-10_ldt
	IES data LFD600S-G2-924-10_IES
	Eulumdat LFD600S-G2-927-10_ldt
	IES data LFD600S-G2-927-10_IES
	Eulumdat LFD600S-G2-930-10_ldt
	IES data LFD600S-G2-930-10_IES
	Eulumdat LFD600S-G2-940-10_ldt
	IES data LFD600S-G2-940-10_IES
	Eulumdat LFD1000S-G2-824-10_ldt
	IES data LFD1000S-G2-824-10_IES
	Eulumdat LFD1000S-G2-827-10_ldt




















Product family datasheet

	IES data LFD1000S-G2-827-10_IES
	Eulumdat LFD1000S-G2-830-10_ldt
	IES data LFD1000S-G2-830-10_IES
	Eulumdat LFD1000S-G2-840-10_ldt
	IES data LFD1000S-G2-840-10_IES
	Eulumdat LFD1000S-G2-927-10_ldt
	IES data LFD1000S-G2-927-10_IES
	Eulumdat LFD1000S-G2-930-10_ldt
	IES data LFD1000S-G2-930-10_IES
	Eulumdat LFD1000S-G2-940-10_ldt
	IES data LFD1000S-G2-940-10_IES
	User instruction LINEARlight FLEX DIFFUSE
	Product Datasheet LINEARlight FLEX DIFFUSE Side (EN)
	Certificates CB TEST CERTIFICATE DE-57743
	Declarations of conformity Flex Diffuse CE 3557934 221121
	Declarations of conformity 726048_Manufacturer Declaration_LINEARlight Flex Diffuse
	Eulumdat LFD400S-G1-830-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-830-06
	IES data LFD400S-G1-830-06 IES 28032022
	IES data IES data LFD400S-G1-830-06
	Eulumdat LFD400S-G1-835-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-835-06
	IES data LFD400S-G1-835-06 IES 28032022














Product family datasheet

	IES data IES data LFD400S-G1-835-06
	Eulumdat LFD400S-G1-840-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-840-06
	IES data LFD400S-G1-840-06 IES 28032022
	IES data IES data LFD400S-G1-840-06
	Eulumdat LFD400S-G1-850-06 LDT 28032022
	IES data LFD400S-G1-850-06 IES 28032022
	Eulumdat LFD400S-G1-924-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-924-06
	IES data LFD400S-G1-924-06 IES 28032022
	IES data IES data LFD400S-G1-924-06
	Eulumdat LFD400S-G1-865-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-865-06
	IES data LFD400S-G1-865-06 IES 28032022
	IES data IES data LFD400S-G1-865-06
	Eulumdat LFD400S-G1-930-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-930-06
	IES data LFD400S-G1-930-06 IES 28032022
	IES data IES data LFD400S-G1-930-06
	Eulumdat LFD400S-G1-935-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-935-06
	IES data LFD400S-G1-935-06 IES 28032022
	IES data IES data LFD400S-G1-935-06

Product family datasheet

	Eulumdat LFD400S-G1-940-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-940-06
	IES data LFD400S-G1-940-06 IES 28032022
	IES data IES data LFD400S-G1-940-06
	Eulumdat LFD400S-G1-965-06 LDT 28032022
	Eulumdat Eulumdat LFD400S-G1-965-06
	IES data LFD400S-G1-965-06 IES 28032022
	IES data IES data LFD400S-G1-965-06
	Certificates EAC Certificate
	Certificates CB TEST CERTIFICATE DE-59261
	Eulumdat LFD600S-G1-827-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-827-06
	IES data LFD600S-G1-827-06 IES 28032022
	IES data IES data LFD600S-G1-827-06
	Eulumdat LFD600S-G1-835-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-835-06
	IES data LFD600S-G1-835-06 IES 28032022
	IES data IES data LFD600S-G1-835-06
	Eulumdat LFD600S-G1-840-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-840-06
	IES data LFD600S-G1-840-06 IES 28032022
	IES data IES data LFD600S-G1-840-06
	Eulumdat LFD600S-G1-865-06 LDT 28032022

Product family datasheet

	Eulumdat Eulumdat LFD600S-G1-865-06
	IES data LFD600S-G1-865-06 IES 28032022
	IES data IES data LFD600S-G1-865-06
	Eulumdat LFD600S-G1-924-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-924-06
	IES data LFD600S-G1-924-06 IES 28032022
	IES data IES data LFD600S-G1-924-06
	Eulumdat LFD600S-G1-930-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-930-06
	IES data LFD600S-G1-930-06 IES 28032022
	IES data IES data LFD600S-G1-930-06
	Eulumdat LFD600S-G1-935-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-935-06
	IES data LFD600S-G1-935-06 IES 28032022
	IES data IES data LFD600S-G1-935-06
	Eulumdat LFD600S-G1-940-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-940-06
	IES data LFD600S-G1-940-06 IES 28032022
	IES data IES data LFD600S-G1-940-06
	Eulumdat LFD600S-G1-965-06 LDT 28032022
	Eulumdat Eulumdat LFD600S-G1-965-06
	IES data LFD600S-G1-965-06 IES 28032022
	IES data IES data LFD600S-G1-965-06

Product family datasheet

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172273992	LFD400S -G2-824-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274012	LFD400S -G2-827-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274036	LFD400S -G2-830-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274074	LFD400S -G2-840-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274111	LFD400S -G2-924-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274135	LFD400S -G2-927-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274159	LFD400S -G2-930-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172274197	LFD400S -G2-940-10	Shipping carton box 4	519 mm x 167 mm x 525 mm	45.50 dm ³	12480.00 g
4062172270618	LFD600S -G2-824-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270632	LFD600S -G2-827-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270656	LFD600S -G2-830-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g

Product family datasheet

Logistical Data

4062172270694	LFD600S -G2-840-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270731	LFD600S -G2-924-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270755	LFD600S -G2-927-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270779	LFD600S -G2-930-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172270816	LFD600S -G2-940-06	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	11710.00 g
4062172271097	LFD1000S -G2-824-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271110	LFD1000S -G2-830-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271134	LFD1000S -G2-827-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271172	LFD1000S -G2-840-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271233	LFD1000S -G2-927-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271257	LFD1000S -G2-930-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4062172271295	LFD1000S -G2-940-04	Shipping carton box 6	420 mm x 232 mm x 430 mm	41.90 dm ³	9640.00 g
4052899581807	LFD400S -G1-830-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172001052	LFD400S -G1-835-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899581821	LFD400S -G1-840-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172007658	LFD400S -G1-850-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025621	LFD400S -G1-924-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899581845	LFD400S -G1-865-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025645	LFD400S -G1-930-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025669	LFD400S -G1-935-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025683	LFD400S -G1-940-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g

Product family datasheet

Logistical Data

4062172025706	LFD400S -G1-965-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4052899582026	LFD600S -G1-827-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172001090	LFD600S -G1-835-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899582064	LFD600S -G1-840-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4052899582088	LFD600S -G1-865-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025829	LFD600S -G1-924-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025843	LFD600S -G1-930-06	Shipping carton box 6	519 mm x 246 mm x 525 mm	67.03 dm ³	13358.00 g
4062172025867	LFD600S -G1-935-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025881	LFD600S -G1-940-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g
4062172025904	LFD600S -G1-965-06	Shipping carton box 6	420 mm x 246 mm x 430 mm	44.43 dm ³	11640.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Accessories Optional

Product description	Accessory name	Accessory code
LFD400S -G2-824-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-824-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-824-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-824-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-824-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-824-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-824-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-824-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-824-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-827-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-827-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-827-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-827-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Product family datasheet

LFD400S -G2-827-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-827-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-827-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-827-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-827-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-830-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-830-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-830-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-830-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-830-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-830-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-830-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-830-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-830-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-840-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-840-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-840-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-840-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-840-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-840-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-840-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-840-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-840-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-924-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-924-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-924-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-924-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-924-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-924-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-924-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-924-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-924-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-927-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-927-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-927-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-927-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-927-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-927-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039

Product family datasheet

LFD400S -G2-927-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-927-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-927-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-930-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-930-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-930-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-930-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-930-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-930-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-930-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-930-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-930-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G2-940-10	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G2-940-10	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G2-940-10	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G2-940-10	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G2-940-10	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G2-940-10	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G2-940-10	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G2-940-10	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G2-940-10	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-824-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-824-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-824-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-824-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-824-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-824-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-824-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-824-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-824-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-827-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-827-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-827-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-827-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-827-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-827-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-827-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-827-06	FX-DCS -G1-GL-25	▶ 4052899452244

Product family datasheet

LFD600S -G2-827-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-830-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-830-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-830-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-830-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-830-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-830-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-830-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-830-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-830-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-840-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-840-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-840-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-840-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-840-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-924-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-924-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-924-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-924-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-924-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-927-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-927-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-927-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-927-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-927-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-927-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-927-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-927-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-927-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-930-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583

Product family datasheet

LFD600S -G2-930-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-930-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-930-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-930-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-930-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G2-940-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G2-940-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G2-940-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G2-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G2-940-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G2-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G2-940-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G2-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G2-940-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-824-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-824-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-824-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-824-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-824-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-824-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-824-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-824-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-824-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-830-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-830-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-830-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-830-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-830-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-830-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-830-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-830-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-830-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-827-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-827-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-827-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572

Product family datasheet

LFD1000S -G2-827-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-827-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-827-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-827-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-827-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-827-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-840-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-840-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-840-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-840-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-840-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-840-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-840-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-840-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-840-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-840-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-840-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-840-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-840-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-840-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-840-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-840-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD1000S -G2-840-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-840-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-840-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-840-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD1000S -G2-840-04	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD1000S -G2-840-04	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD1000S -G2-840-04	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD1000S -G2-840-04	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015

Product family datasheet

LFD1000S -G2-940-04	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD1000S -G2-940-04	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD1000S -G2-940-04	FX-DCS -G1-GL-25	▶ 4052899452244
LFD1000S -G2-940-04	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-830-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-830-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-830-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-830-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-830-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-830-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-830-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-830-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-830-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-835-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-835-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-835-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-835-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-835-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-835-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-835-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-835-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-835-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-840-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-840-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-840-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-840-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-840-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-850-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-850-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-850-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-850-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-850-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-850-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-850-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121

Product family datasheet

LFD400S -G1-850-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-850-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-924-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-924-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-924-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-924-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-924-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-865-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-865-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-865-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-865-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-865-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-865-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-865-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-865-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-865-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-930-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-930-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-930-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-930-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-930-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-930-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-935-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-935-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-935-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-935-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-935-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-935-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-935-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-935-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-935-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925

Product family datasheet

LFD400S -G1-940-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-940-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-940-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-940-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-940-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-940-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD400S -G1-965-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD400S -G1-965-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD400S -G1-965-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD400S -G1-965-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD400S -G1-965-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD400S -G1-965-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD400S -G1-965-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD400S -G1-965-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD400S -G1-965-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-827-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-827-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-827-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-827-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-827-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-827-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-827-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-827-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-827-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-835-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-835-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-835-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-835-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-835-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-835-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-835-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-835-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-835-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-840-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-840-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541

Product family datasheet

LFD600S -G1-840-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-840-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-840-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-840-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-840-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-840-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-840-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-865-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-865-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-865-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-865-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-865-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-865-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-865-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-865-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-865-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-924-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-924-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-924-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-924-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-924-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-924-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-924-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-924-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-924-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-930-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-930-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-930-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-930-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-930-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-930-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-930-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-930-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-930-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-935-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-935-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-935-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-935-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Product family datasheet

LFD600S -G1-935-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-935-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-935-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-935-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-935-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-940-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-940-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-940-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-940-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-940-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-940-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-940-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-940-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-940-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925
LFD600S -G1-965-06	FX-LFDM -BEND-1000 KIT 3PCS	▶ 4062172192583
LFD600S -G1-965-06	FX-LFDM -G1-BS-12H13	▶ 4052899452541
LFD600S -G1-965-06	FX-LFDM -G1-BSL-12H13E9	▶ 4052899452572
LFD600S -G1-965-06	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971
LFD600S -G1-965-06	FX-DCS -G1-CM2PF-IP67-SIDEKIT5	▶ 4052899452015
LFD600S -G1-965-06	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039
LFD600S -G1-965-06	FX-DCS -G1-ECS-KIT20	▶ 4052899452121
LFD600S -G1-965-06	FX-DCS -G1-GL-25	▶ 4052899452244
LFD600S -G1-965-06	FX-LFDM -G1-TS-16H16-200	▶ 4052899544925

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.